



Airpanel Select  
Power  
Pleated Panel  
Filters for GT

# Airpanel Select Power

**Product Range**



**Features**



**Applications**



**Filter Class**

**G Coarse**



**KEY FACTS**

- Synthetic/cotton filter media
- No fiber shedding
- Stable design
- High dust holding capacity
- Top cost-benefit ratio
- Lightweight

**DESIGN**

Open-pleated synthetic/cotton filter media, bonded securely into a rigid, water-resistant cardboard case. The pleats are supported by a galvanized steel mesh to provided added pleat stability during operation.

**APPLICATIONS**

Prefiltration for gas turbine air intakes.

# Airpanel Select Power


## PERFORMANCE DATA

Article No.	Filter Class		Dimensions	Flow Rate	Pressure Drop
	ISO 16890	EN 779			
800226064052	Coarse 75%	G4	596 x 596 x 98	3400	62
				4250	90
800226064053	Coarse 75%	G4	287 x 596 x 98	1700	62
				2125	90

## SPECIFICATION

<b>Recommended air flow</b>	< 4250 m <sup>3</sup> /h	<b>Recommended final pressure drop</b>	Initial pressure x 2 (max. 450 Pa)
<b>Heat resistance</b>	Max. 70 °C	<b>Moisture resistance</b>	100 % rel. humidity
<b>Regenerable</b>	No	<b>Incinerable</b>	Yes



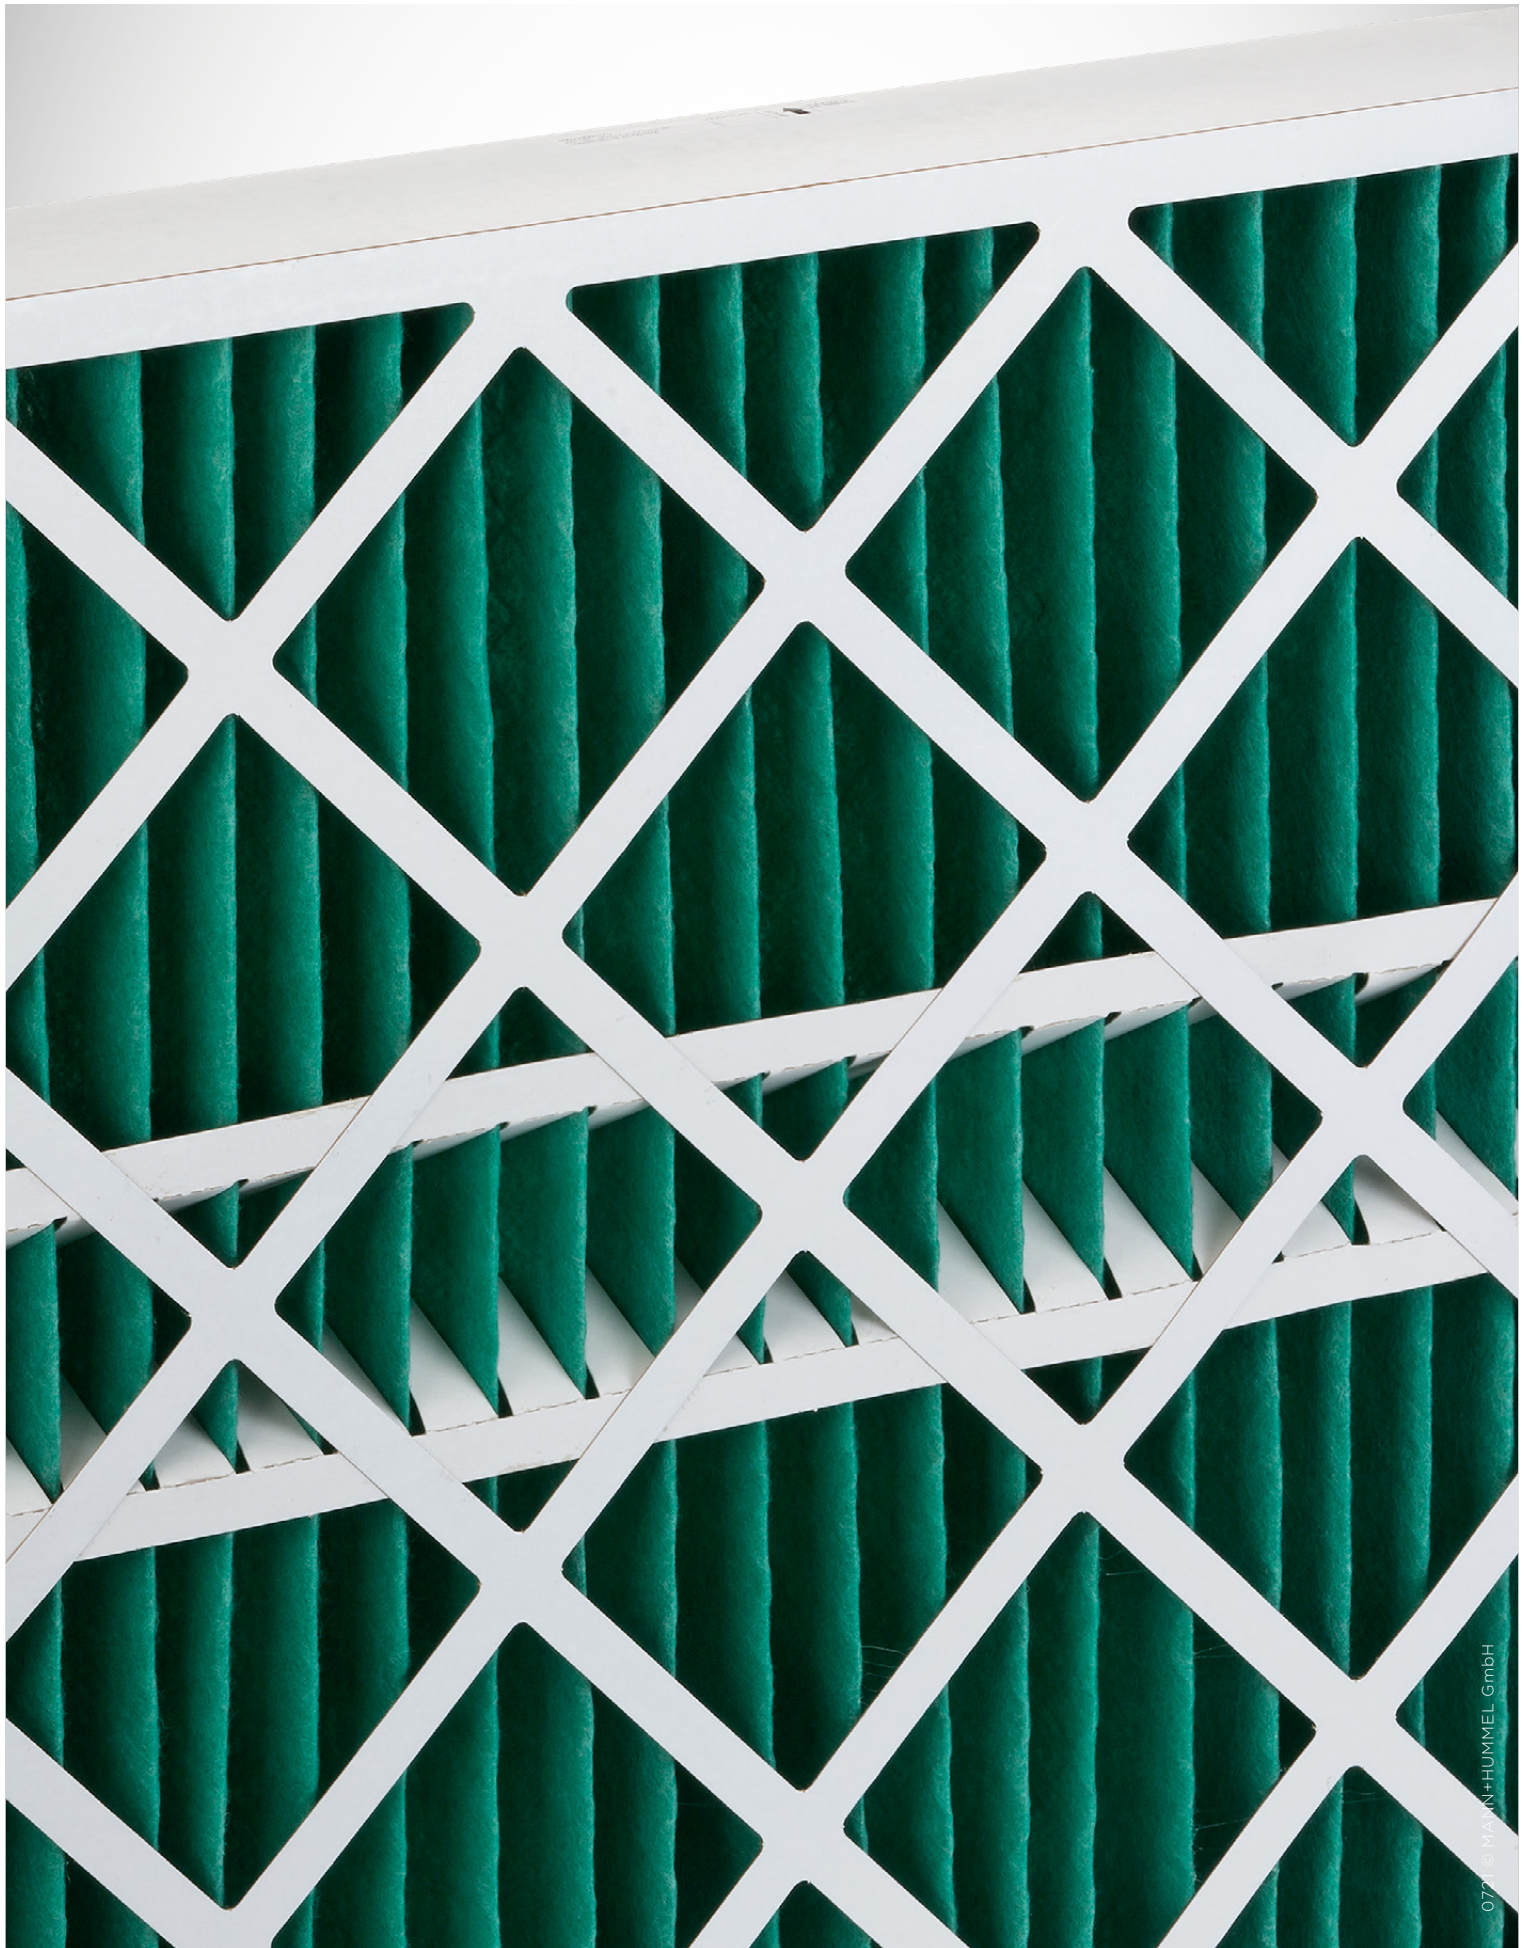

077 © MANN+HUMMEL GmbH